


SYCAMORE CEILING FAN



Brushed Aluminium

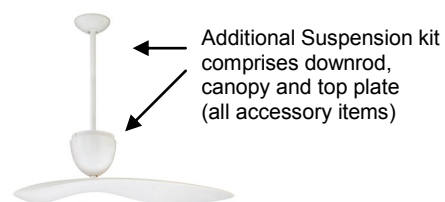

Additional Suspension kit comprises downrod, canopy and top plate (all accessory items)

Installation Locations:

Indoor Only. Avoid windy locations as the wind may affect the balance of the fan.

Recommended Height:

There should be at least 2.1m between the lowest point of the fan blades and the floor.

Top of canopy cover to lowest point of the fan:

Approximately 370mm

Motor:

16 Pole, 153mm x 18mm motor

Made with the highest grade copper windings and silicone steel stator. Bearings are sealed to ensure quiet operation and long life.

Motor Housing:

Materials: Die Cast Aluminium

Available Colours :

White, Matt Black & Brushed Aluminium

Blades:

Sizes: 1370mm (54")

Materials: Injection Moulded Plastic

Blade Pitch: 12°

Available Blade Colours:

White, Matt Black & Brushed Silver

Extra Information:

Introduced into the HPI range in 2005

Winner Australian Design Award 2005

3 Speed wall controller

Not Light Adaptable

Not Reversible

Standard Canopy Cover:

Suitable for flat ceilings only. Can be used on pitched ceilings up to 22° with a suspension kit.

Wall Controller Speed Capacitor Values:

3µF & 2µF

Rotational Diameter:

1370mm (54") Blade Sweep

Ceiling to top side of the blade:

Approximately 325mm

Weight Including Packaging:

Motor: 6.2kg

Blade: 3.1kg

Packaging Dimensions (cm):

Motor: 42L x 25W x 25H

Blade: 115L x 23W x 15H

Accessories:

Remote Control

Extension Down Rod 26mm diameter

Suspension Kit (Canopy and top plate only)

T-Hook for ceiling roses

Universal Mounting Brace

Warranty

2 years "in home" covering major defects

3 Years additional covering motor only (not labour)

Remotes -1 year "in home" covering major defects. (receiver and handpiece)

Lights -1 year "in home" covering major defects

Airflow and Efficiency:

Airflow measured in Australia using the "Energy Star Solid-State Test Method", the only test method recognised For USA Energy Star compliance.

	HIGH	MED	LOW
RPMS	169	121	74
WATTS	34.5	19	9.3
AIRFLOW[^]: AUS-ES / USA-ES	7696 / 10390	5625 / 7594	3322 / 4485
EFFICIENCY[^]: AUS-ES / USA-ES	223.07 / 301.15	296.05 / 399.67	3573.20 / 482.23

[^] Airflow measured in Cubic metres/ Hour (CM/HR), Efficiency measured in CM/HR per watt (CMH/W)

For full warranty details please see Hunter Pacific International's website www.hunterpacific.com.au