

AURORA ALTERNATIVES 2 CEILING FAN



Antique brass motor with rosewood blades

Installation Locations:

Indoor only

Recommended Height:

There should be at least 2.1m between the lowest point of the fan blades and the floor.

Top of canopy cover to lowest point of the fan without light fittings attached:

Approximately 330mm

Motor:

16 Pole, 153mm x 18mm motor

Made with the highest grade copper windings and silicone steel stator. Bearings are sealed to ensure quiet operation and long life.

Motor Housing:

Materials: Pressed Steel

Available Colours :

White, White Birch, Matt Black, Brushed Chrome, Antique Brass, Satin Brass, Polished Brass & Burnt Copper

Blades:

Sizes: 1020mm (40") Paddle/Rounded, 1220mm (48")

Straight Style, 1320mm (52") Straight Style

Materials: NZ plywood, Painted finish

Blade Pitch: 12°

Available Blade Colours:

White, White Birch, Black, Rosewood, Washed Oak, Pine, Beech, Walnut & Brushed Aluminium

Extra Information:

Introduced into the HPI range in 2006

3 Speed wall controller

Light Adaptable

Reversible

Standard Canopy Cover:

Suitable for flat and pitched ceilings up to 28°

Wall Controller Speed Capacitor Values:

3.5µF & 1.7µF

Rotational Diameter:

1020mm (40"), 1220mm (48") & 1320mm (52) Blade Sweep

Weight Including Packaging:

Motor Unit: 7.2kg

Blades (1020mm/1220mm/1320mm): 0.96kg / 0.98kg / 1.2kg

Packaging Dimensions (cm):

Motor Unit: 38L x 29W x 31H

Blades: (1020mm/1220mm/1320mm): 42L x 16W x 3H
52L x 14W x 3H / 57L x 16W x 3H

Accessories:

Remote Control

Extension Down Rod 26mm diameter

45° Ceiling Kit (for pitched ceilings)

T-Hook for ceiling roses

Universal Mounting Brace

Warranty

2 years "in home" covering major defects

3 Years additional covering motor only (not labour)

Remotes -1 year "in home" covering major defects.
(receiver and handpiece)

Lights -1 year "in home" covering major defects

Airflow and Efficiency:

Airflow measured in Australia using the "Energy Star Solid-State Test Method", the only test method recognised For USA Energy Star compliance.

<i>Figures shown are tested on 52" Fan</i>	HIGH	MED	LOW
RPMS	188	144	80
WATTS	53.7	31.6	11.9
AIRFLOW[^]: AUS-ES / USA-ES	8225 / 11104	6396 / 8635	3537 / 4775
EFFICIENCY[^]: AUS-ES / USA-ES	153.17 / 206.78	202.41 / 273.26	297.23 / 401.26


[^] Airflow measured in Cubic metres/ Hour (CM/HR), Efficiency measured in CM/HR per watt (CMH/W)

For full warranty details please see Hunter Pacific International's website www.hunterpacific.com.au

AURORA 2 CEILING FAN LIGHTING




78mm Halogen Light (MAX 100W)

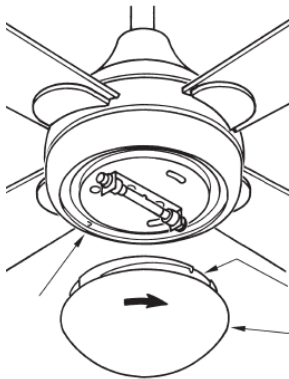

- Cost effective
- Colour—warm white
- Dimmable
- Compact in size


78mm linear Halogen Light globe




AURORA 2 ACCESSORY LIGHT FITTING



E14 Light (MAX 2x40W)

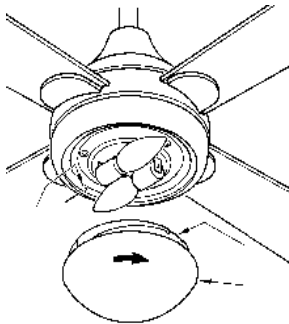

- Accepts a variety of lamps, e.g. incandescent, fluorescent.
- Cost effective
- Compatible with some CFL lamps



Colours Available:



White, White Birch, Matt Black, Brushed Chrome, Antique Brass, Satin Brass, Polished Brass & Burnt Copper

Packaging Dimensions

17H x 27W x 27L

Weight: 1.10kg

GX53M 14W Compact Fluorescent Light

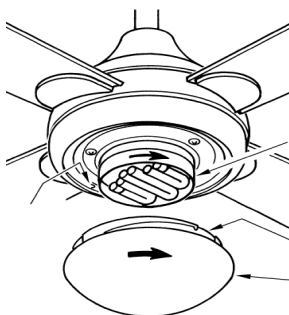

A Base
B Lamp Assembly
C Tube

- Low wattage
- High light output
- Liquid mercury free
- Colour—Warm white/Cool white colour temperatures available
- Low heat
- 12000 hour life span
- 2700k or 3000k

^ All light kits must be installed by a licensed electrician. For further information about correct installation procedures, please see www.hunterpacific.com.au

For full warranty details please see Hunter Pacific International's website www.hunterpacific.com.au